




THIS DRAWING IS THE SOLE PROPERTY OF AK/HA MANUFACTURING LLC



Alternate Remote Blower/Controls Housing

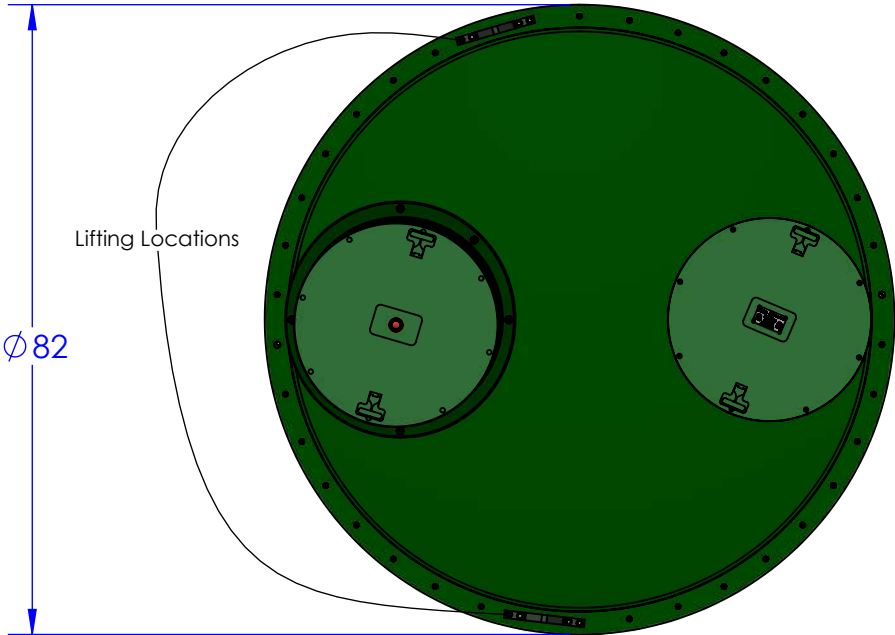

- 1) All auxiliary plumbing, wiring, and installation methods must conform to all country, state, province, and local code.
- 2) All plumbing and connections to be plumbed with SCH 40 PVC or equivalent.
- 3) All manufacturer pipe and conduit penetrations are sealed with Adapt-A-Flex grommets to prevent water ingress/egress.
- 4) All manufacturer electrical connections are terminated in NEMA rated enclosures with NEMA rated cord grips. (NEMA 4X Min.)
- 5) All Electrical components (wire, connectors, control panel, conduit etc.) UL listed.
- 6) For details pertaining to installation requirements, (tank assembly, internal plumbing connections, wiring etc) see HydroAction Installation Manual, and System detail prints.
- 7) Any additional questions pertaining to HydroAction AN series wastewater treatment systems, contact HydroAction.

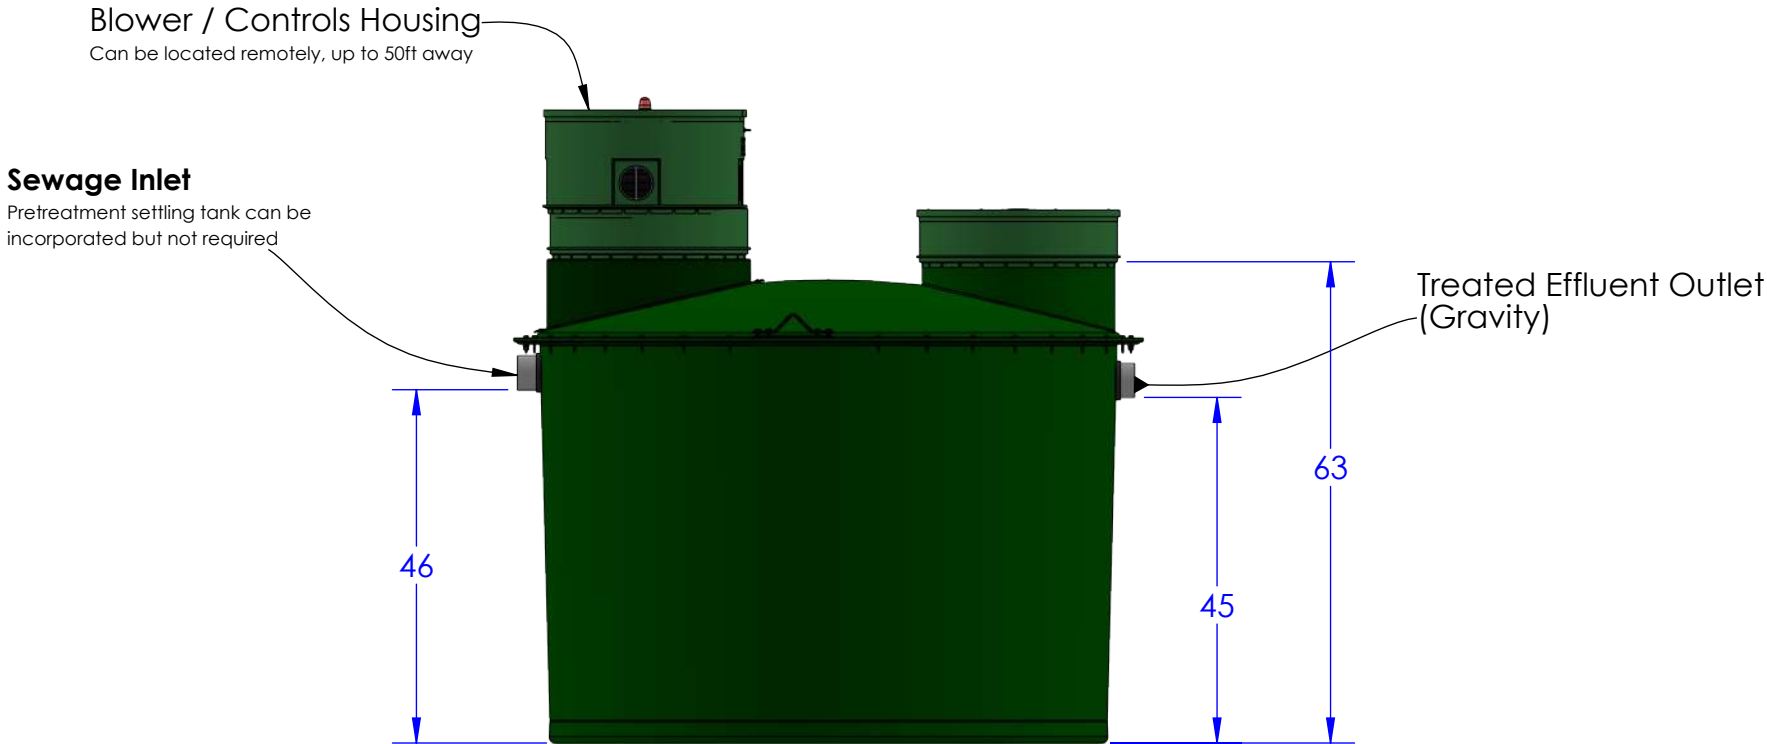


Hydro-Action Specifications	
Model	LP-500
Daily Treatment Capacity	500 Gallons
Total System Working Volume	840 Gallons
Aerobic Working Volume	662 Gallons
Clarifier Working Volume	178 Gallons
Treatment Certification	NSF 40
Supply Power Requirement	1 Phase 120VAC 60Hz 20Amp
Air Supply	HiBlow HP-80 / 2.8 CFM
Tank Material	Fiberglass
Clarifier Material	Fiberglass
Blower / Controls Housing	Polyethylene



THIS DRAWING IS THE SOLE PROPERTY OF AK/HA MANUFACTURING LLC



Remote Blower/Controls Housing

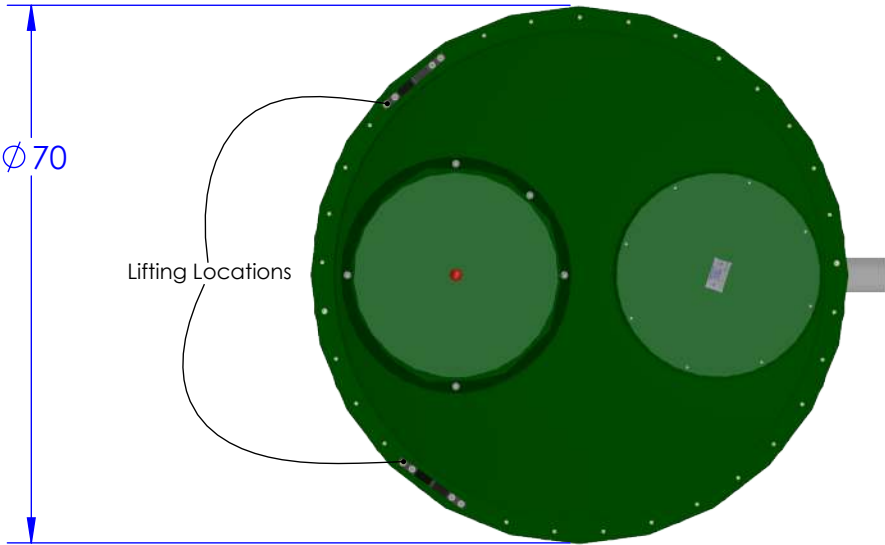


Lifting Locations

Ø 70

Blower / Controls Housing

Sewage Inlet

Pretreatment Settling tank can be incorporated but not required

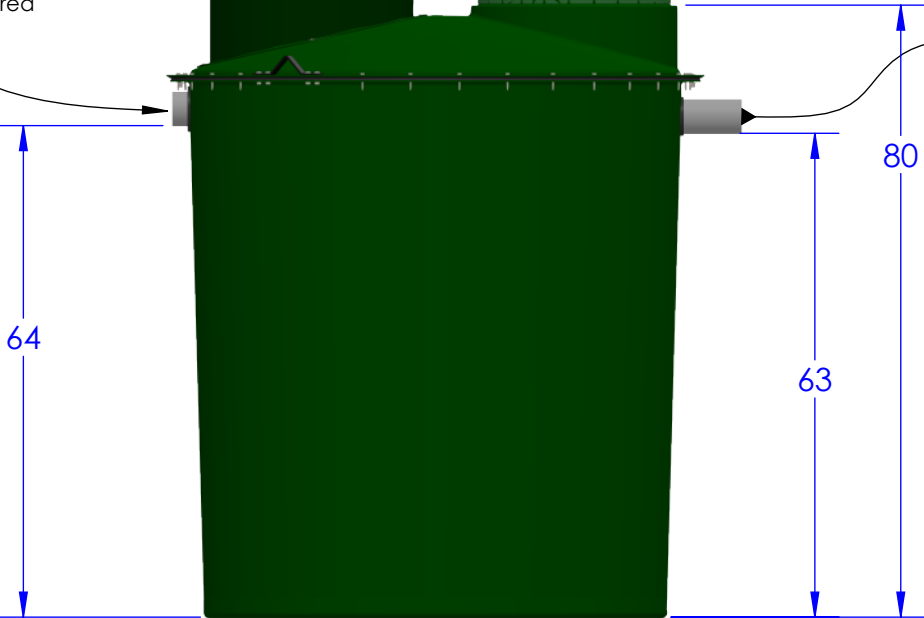


Treated Effluent Outlet
(Gravity)

- 1) All auxiliary plumbing, wiring, and installation methods must conform to all country, state, province, and local code.
- 2) All plumbing and connections to be plumbed with SCH 40 PVC or equivalent.
- 3) All manufacturer pipe and conduit penetrations are sealed with Adapt-A-Flex grommets to prevent water ingress/egress.
- 4) All manufacturer electrical connections are terminated in NEMA rated enclosures with NEMA rated cord grips. (NEMA 4X Min.)
- 5) All Electrical components (wire, connectors, control panel, conduit etc.) UL listed.
- 6) For details pertaining to installation requirements, (tank assembly, internal plumbing connections, wiring etc) see HydroAction Installation Manual, and System detail prints.
- 7) Any additional questions pertaining to HydroAction AN series wastewater treatment systems, contact HydroAction.


Hydro-Action Specifications	
Model	AP-500
Daily Treatment Capacity	500 Gallons
Total System Working Volume	807 Gallons
Aerobic Working Volume	614 Gallons
Clarifier Working Volume	193 Gallons
Treatment Certification	NSF 40
Supply Power Requirement	1 Phase 120VAC 60Hz 20Amp
Air Supply	HiBlow HP-80 / 2.8 CFM
Tank Material	Fiberglass
Clarifier Material	Fiberglass
Blower / Controls Housing	Polyethylene



THIS DRAWING IS THE SOLE PROPERTY OF AK/HA MANUFACTURING LLC




Remote Blower/Controls Housing

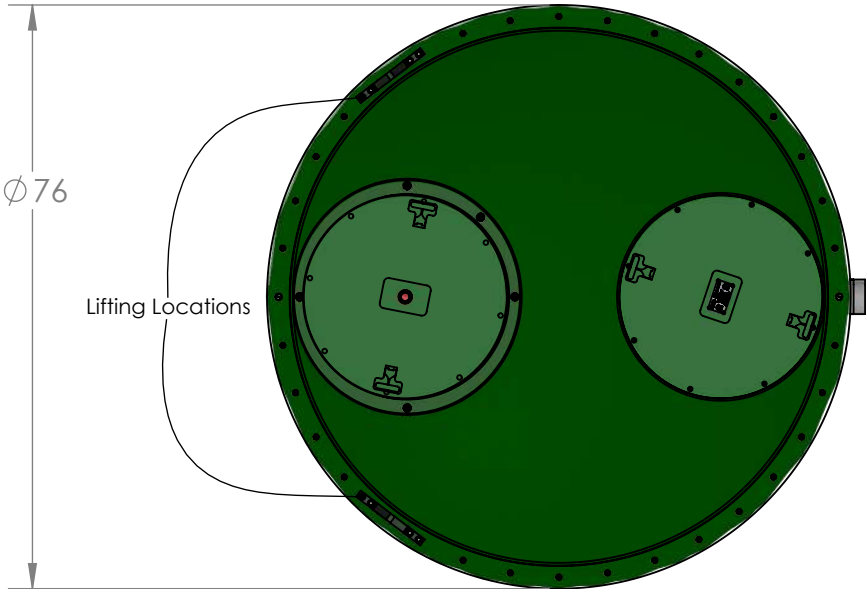

Blower / Controls Housing

Sewage Inlet

Pretreatment Settling tank can be incorporated but not required

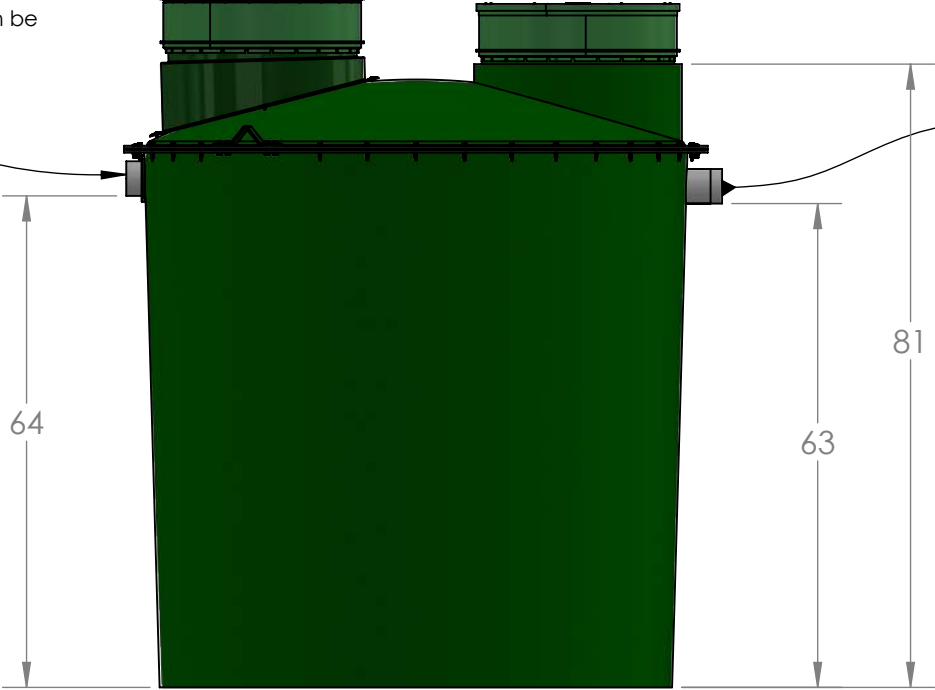


Treated Effluent Outlet
(Gravity)

- 1) All auxiliary plumbing, wiring, and installation methods must conform to all country, state, province, and local code.
- 2) All plumbing and connections to be plumbed with SCH 40 PVC or equivalent.
- 3) All manufacturer pipe and conduit penetrations are sealed with Adapt-A-Flex grommets to prevent water ingress/egress.
- 4) All manufacturer electrical connections are terminated in NEMA rated enclosures with NEMA rated cord grips. (NEMA 4X Min.)
- 5) All Electrical components (wire, connectors, control panel, conduit etc.) UL listed.
- 6) For details pertaining to installation requirements, (tank assembly, internal plumbing connections, wiring etc) see HydroAction Installation Manual, and System detail prints.
- 7) Any additional questions pertaining to HydroAction AN series wastewater treatment systems, contact HydroAction.


Hydro-Action Specifications	
Model	AP-600
Daily Treatment Capacity	600 Gallons
Total System Working Volume	978 Gallons
Aerobic Working Volume	754 Gallons
Clarifier Working Volume	224 Gallons
Treatment Certification	NSF 40
Supply Power Requirement	1 Phase 120VAC 60Hz 20Amp
Air Supply	HiBlow HP-100 / 3.5 CFM
Tank Material	Fiberglass
Clarifier Material	Fiberglass
Blower / Controls Housing	Polyethylene




THIS DRAWING IS THE SOLE PROPERTY OF AK/HA MANUFACTURING LLC



Alternate Remote Blower/Controls Housing

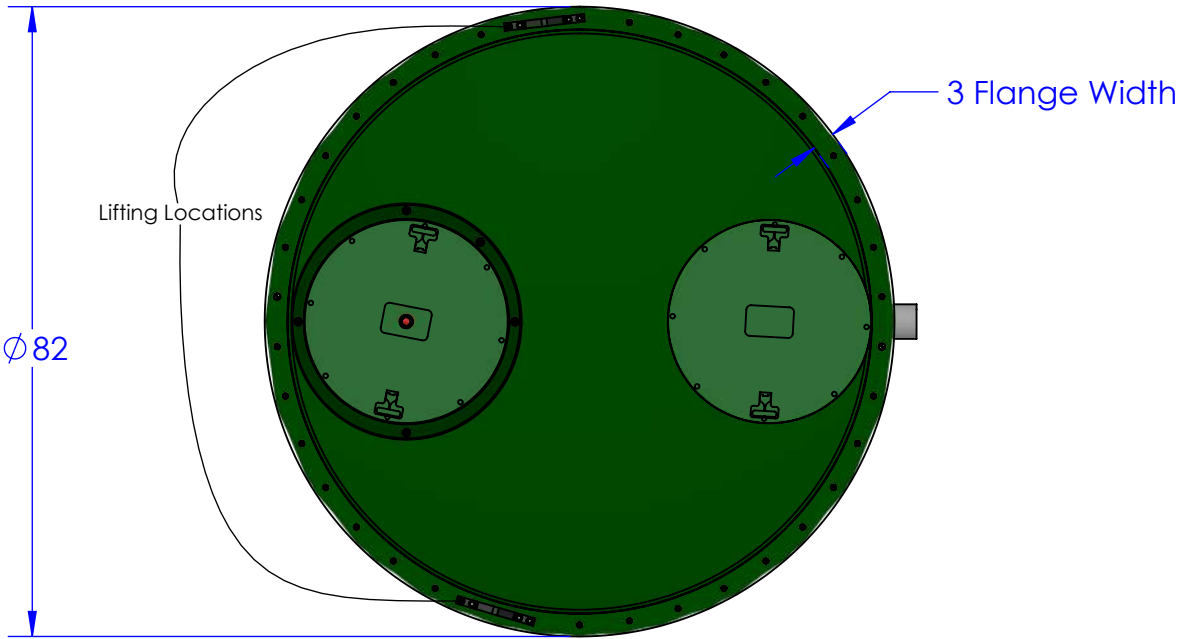


- 1) All auxiliary plumbing, wiring, and installation methods must conform to all country, state, province, and local code.
- 2) All plumbing and connections to be plumbed with SCH 40 PVC or equivalent.
- 3) All manufacturer pipe and conduit penetrations are sealed with Adapt-A-Flex grommets to prevent water ingress/egress.
- 4) All manufacturer electrical connections are terminated in NEMA rated enclosures with NEMA rated cord grips. (NEMA 4X Min.)
- 5) All Electrical components (wire, connectors, control panel, conduit etc.) UL listed.
- 6) For details pertaining to installation requirements, (tank assembly, internal plumbing connections, wiring etc) see HydroAction Installation Manual, and System detail prints.
- 7) Any additional questions pertaining to HydroAction AN series wastewater treatment systems, contact HydroAction.

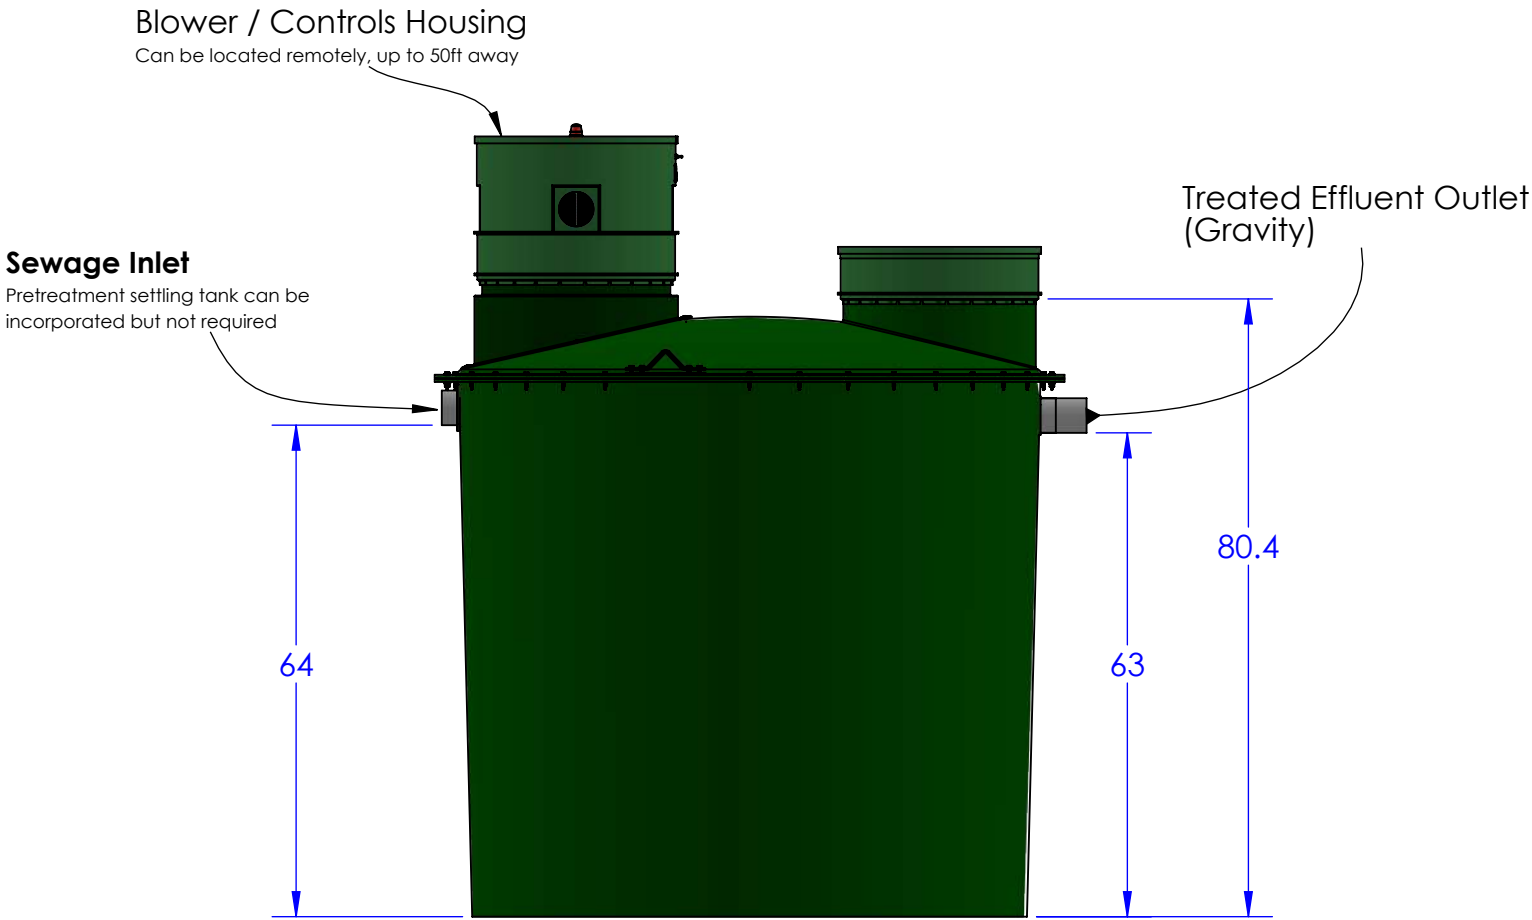

Hydro-Action Specifications	
Model	AP-750
Daily Treatment Capacity	750 Gallons
Total System Working Volume	1,137 Gallons
Aerobic Working Volume	916Gallons
Clarifier Working Volume	221 Gallons
Treatment Certification	NSF 40
Supply Power Requirement	1 Phase 120VAC 60Hz 20Amp
Air Supply	HiBlow HP-120 / 4.2 CFM
Tank Material	Fiberglass
Clarifier Material	Fiberglass
Blower / Controls Housing	Polyethylene



THIS DRAWING IS THE SOLE PROPERTY OF AK/HA MANUFACTURING LLC

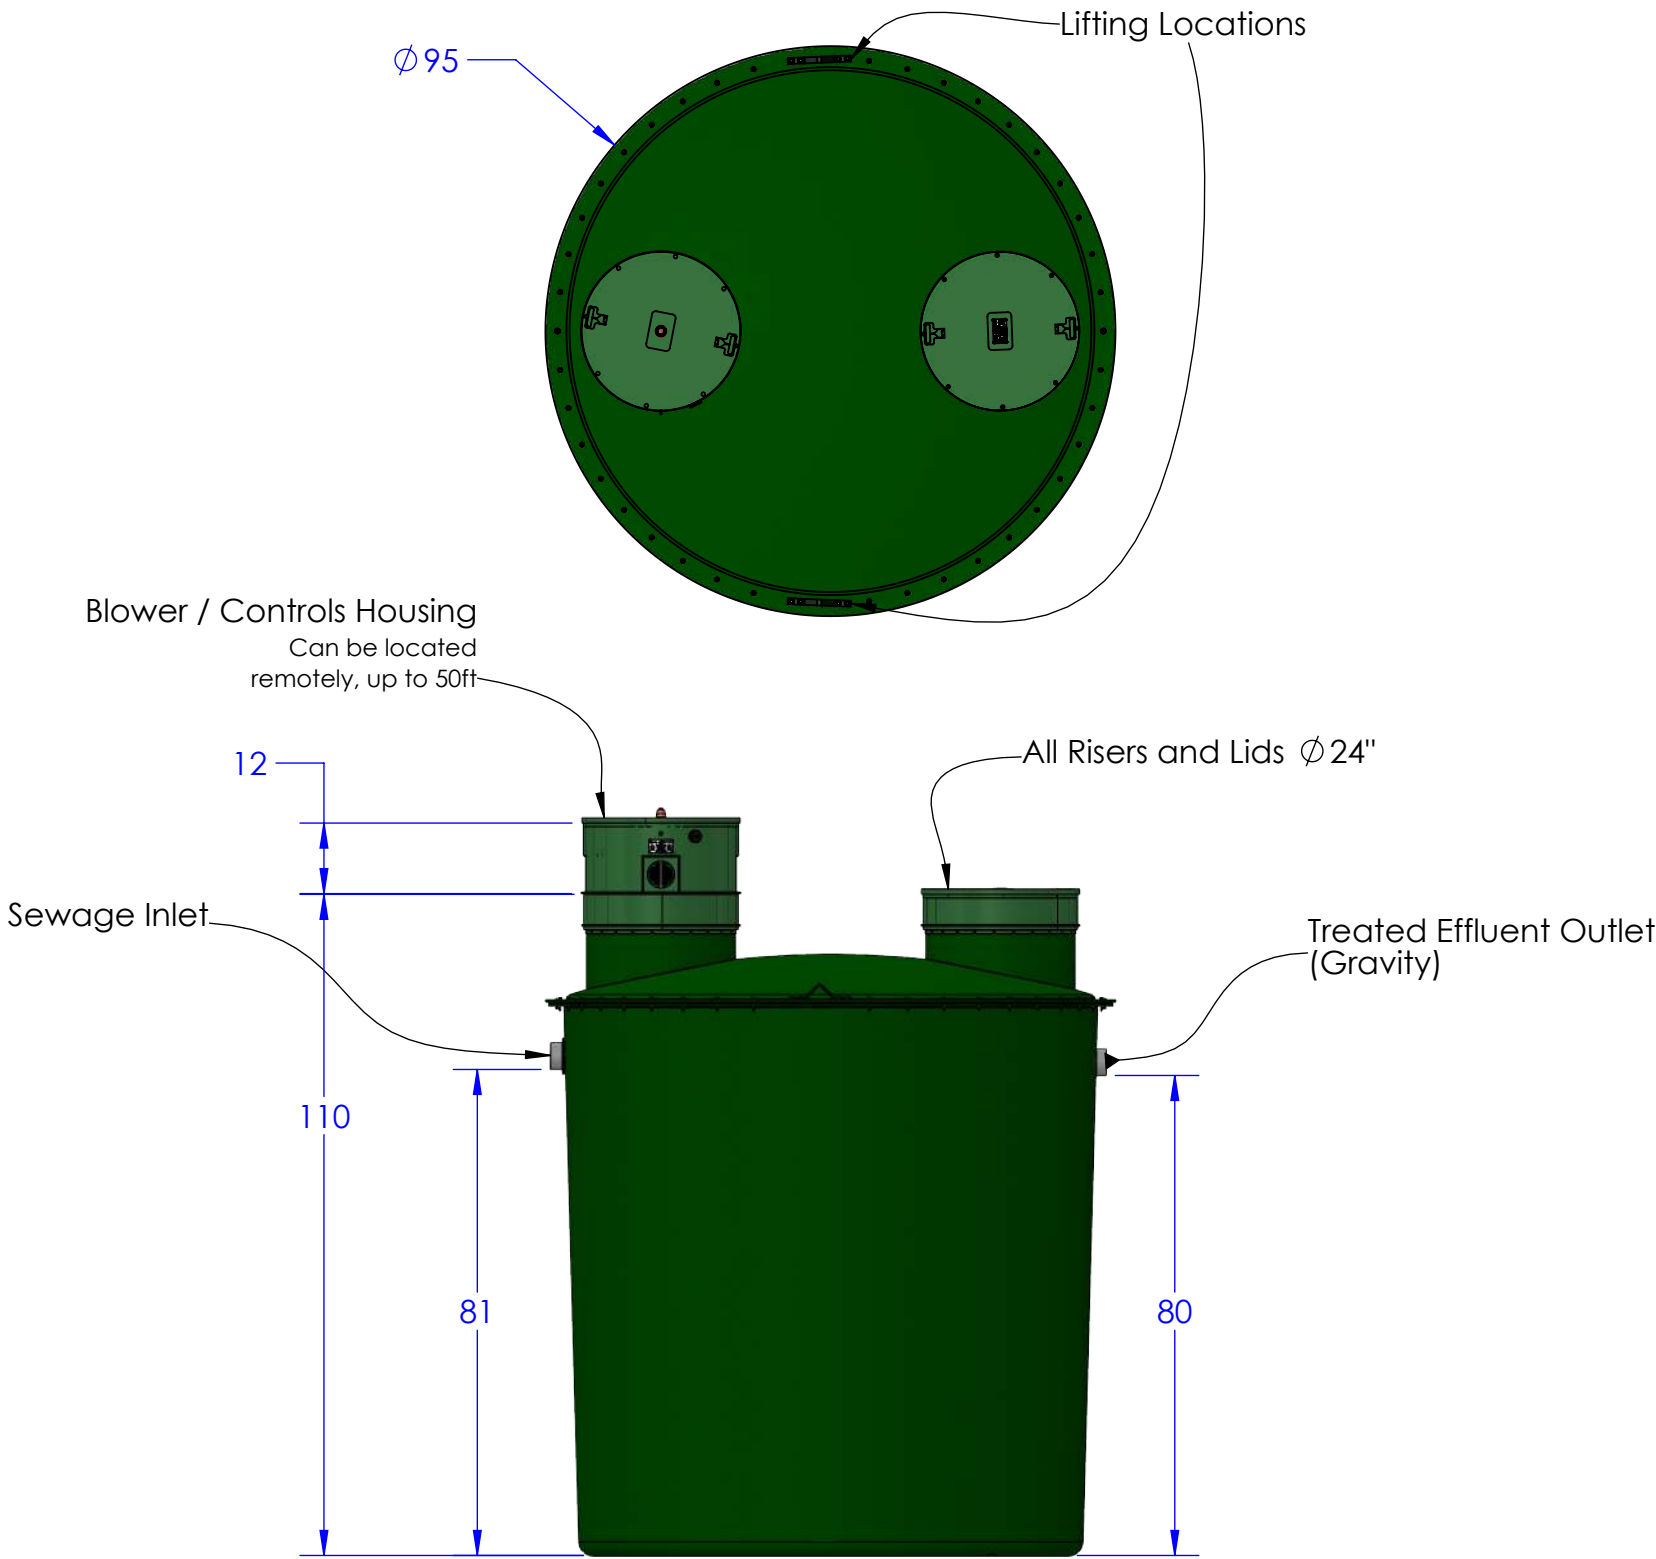

- 1) All auxiliary plumbing, wiring, and installation methods must conform to all county, state, province, and local code.
- 2) All plumbing and connections to be plumbed with SCH 40 pipe or equivalent.
- 3) All manufacturer supplied pipe and conduit penetrations are sealed with Adapt-A-Flex grommets to prevent water ingress/egress.
- 4) All manufacturer electrical connections are terminated in NEMA rated enclosures with NEMA rated cord grips. (NEMA 4X Min.)
- 5) For details pertaining to installation requirements, (tank assembly, internal plumbing connections, wiring etc) see HydroAction Installation Manual, and additional System detail prints.
- 6) Any additional questions pertaining to HydroAction AP series wastewater treatment systems, contact HydroAction.

Hydro-Action Specifications	
Model	AP-1500
Daily Treatment Capacity	1,500 Gallons
Aerobic Working Volume	1,381 Gallons
Clarifier Working Volume	583 Gallons
Treatment Certification	NSF 40
Supply Power Requirement	1 Phase 120VAC 60Hz 20Amp
Air Supply	HiBlow HP-200 / 7.0 CFM
Tank Material	Fiberglass
Clarifier Material	Fiberglass
Blower / Controls Housing	Polyethylene

